


## SPRING PLUG, SIMPLE

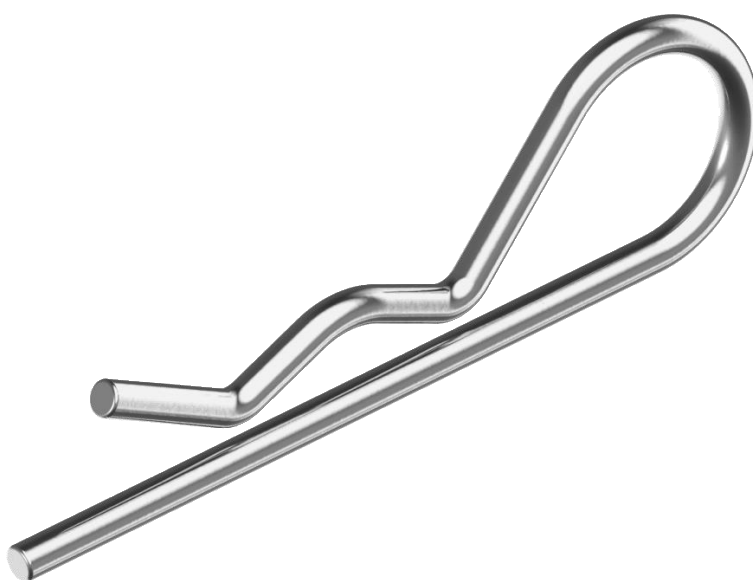

## DATASHEET 8377

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

# 8377

## TECHNICAL SPECIFICATIONS

Spring cotter pins are used for axial fixing of bolts and axles and as anti-rotation devices, e.g. for cap nuts.

<b>Material</b>	Stainless steel
<b>Quality</b>	A2 / A4
<b>Surface</b>	Electropolished

## YOUR ADVANTAGES



EASY TO INSTALL



CORROSION RESISTANT

## PRACTICES




FIXING AXES AND BOLTS



SECURING AGAINST LOSS

FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR

# DIMENSIONS (MM)

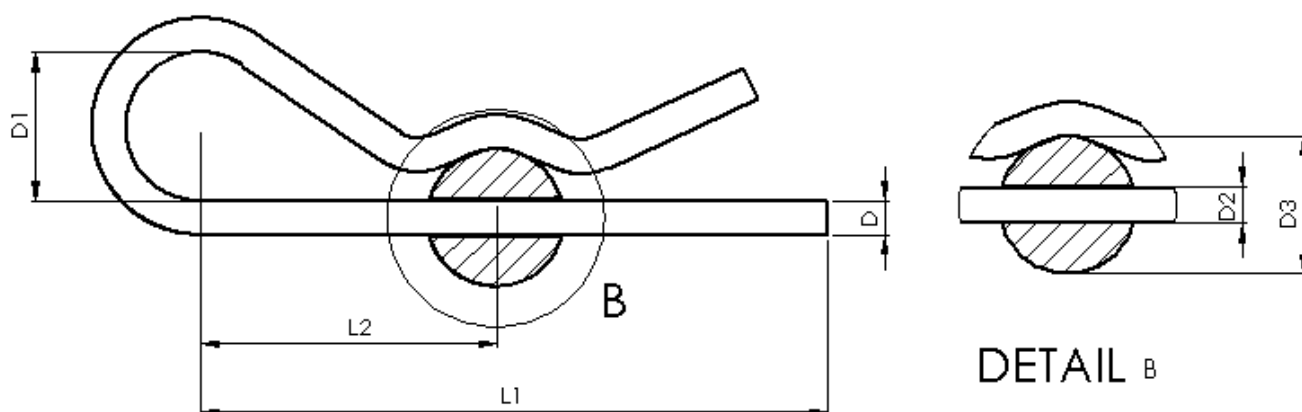

Diameter D		2,0	2,5	3,0	4,0	5,0	6,0
D1	nom.	10	11	16	19	26	30
D2	recommended bore-Ø	2,5	3,0	3,5	4,5	6,0	7,0
D3	Bolt Ø	8-12	>10-16	>16-18	>18-20	>20-28	>28-40
L1	nom.	42	48	58	64	85	107
L2	nom.	17	18	28	29	36	47

**FASTENERS | MARINE HARDWARE | FITTINGS | SOLAR**